

# Propane hoses and accessories

Wide range of hoses

**SIEVERT®**

3 LAYERS FOR SAFETY

Sievert high pressure hoses conform to the EN 559/ISO 3821 standards. Sievert hoses are also extra frost resistant and can be used in temperatures down to -30°C. The Sievert hose is designed with an inner layer of black gas resistant rubber, a middle layer of reinforcing weave to withstand high pressure and an outer orange coloured layer to protect against external damage, sunlight and ozone.

Sievert hoses are available with inside diameters of 5 mm, 6,3mm and 8 mm in 50 meter rolls or as factory fitted and leak tested hose kits.

## Propane hoses

Diameter 5 mm  
EN 559 / ISO 3821

Propane hose no.	Hose connection	Handle connection	Connection type	Length, m
853090	-			50 metre roll
717321	BSP 3/8"LH	BSP 3/8"LH	Fixed	2
717341	BSP 3/8"LH	BSP 3/8"LH	Fixed	4
717431	BSP 3/8"LH	BSP 3/8"LH	Fixed	10
701501	BSP 3/8"LH	M14x1	Fixed	2
701291	BSP 3/8"LH	M14x1	Fixed	4
701261	BSP 3/8"LH	M14x1	Fixed	10
717320	BSP 3/8"LH	BSP 3/8"LH	Fixed / Swivel	2
701294	BSP 3/8"LH	BSP 3/8"LH	Fixed / Swivel	4
701505	BSP 3/8"LH	M14x1	Fixed / Swivel	2
701290	BSP 3/8"LH	M14x1	Fixed / Swivel	4

## Propane hoses for large burners

Extra resistant  
Diameter 6,3 mm  
DIN 4815 6,3 mm

Propane hose no.	Connections	Handle connection	Connection type	Length, m
770037	BSP 3/8"LH	BSP 3/8"LH	Fixed	5
770039	BSP 3/8"LH	BSP 3/8"LH	Fixed	8
770038	BSP 3/8"LH	BSP 3/8"LH	Fixed	10
770015	BSP 3/8"LH	BSP 3/8"LH	Fixed	20


Flexible  
Diameter 8 mm  
EN 559 / ISO 3821

836990	-			50 metre roll
701295	BSP 3/8"LH	BSP 3/8"LH	Fixed	5
711511	BSP 3/8"LH	BSP 3/8"LH	Fixed	10
701510	BSP 3/8"LH	BSP 3/8"LH	Fixed / Swivel	10
711510	BSP 3/8"LH	M14x1	Fixed / Swivel	10

# Propane hoses and accessories

## Quick connections

### Quick connections

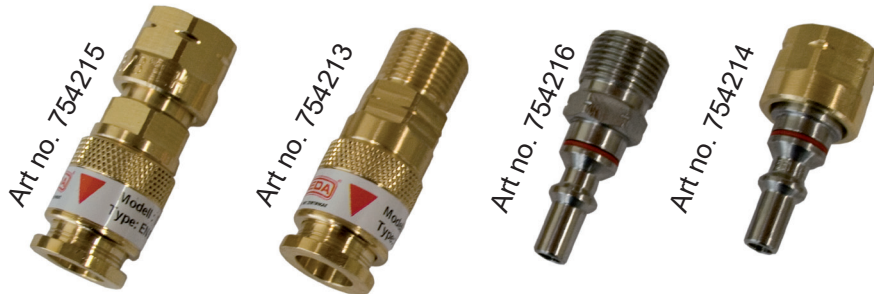

#### Gas quick connection according to EN 561, ISO 7289

- Double O-ring sealing
- Gas cut-off

#### Threads:

In accordance with EN 560, ISO 3253 or country specific connections: 3/8"LH

Art no.	Description	Connection	Weight, g	Dimension, mm
754213	Quick connection OT	G3/8" LH OT	77,3	53x21
754214	Coupling pin IT	G3/8" LH IT	41,8	47x21
754215	Quick connection IT	G3/8" LH IT	86,4	52x21
754216	Coupling pin OT	G3/8" LH OT	29,3	47,5x15

OT=Outside thread IT=Inside thread



### Hose nipples Fixed

Hose nipple no.	709621	709180	708971	717000	717020
Thread	BSP 3/8"LH	BSP 3/8"LH	M14x1	Shell	POL
Inside hose Ø, mm	5	5 and 8	5 and 8	5 and 8	5 and 8




### Hose nipples Swivel

Hose nipple no.	722001	717331	715161	Hose clip no.	901359	900477
Thread	BSP 3/8"LH	BSP 3/8"LH	M14x1	Inside hose Ø, mm	5	8 adjustable
Inside hose Ø, mm	5	5 and 8	5 and 8			




### Connections

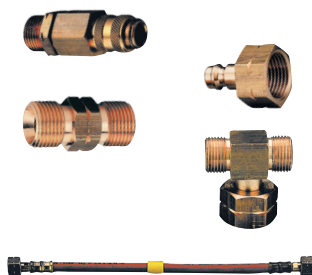

Connections no.	Description
754206	Quick Connection female, BSP 3/8"LH for hose
754210	Nipple for Quick Connection male, BSP 3/8"LH for handle
770512	Double nipple, BSP 3/8"LH x BSP 3/8"LH for hose
770067	Connection for connecting two hoses, DIN Kombi
770082	Hose for 770067, length 40 cm, DIN Kombi

### Valve



Valve no.	Description
700001	Valve adaptor M14-1,5 / BSP 3/8"LH. Horizontal outlet, convenient swivel connection.